

TREE 8TX Eco Gigabit Unmanaged Switch


8 port Gigabit unmanaged Switch  
Connection cables are in the online shop under "Connection Technology".

[Link naar het product](#)

Afbeelding



Product van afwijken van afbeelding

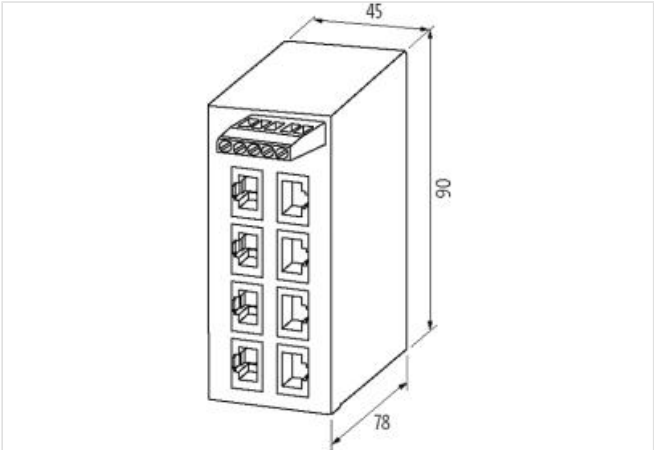

| Commerciële gegevens                              |               |
|---------------------------------------------------|---------------|
| ECLASS-6.0                                        | 19170106      |
| ECLASS-6.1                                        | 19170106      |
| ECLASS-7.0                                        | 19170106      |
| ECLASS-8.0                                        | 19170106      |
| ECLASS-9.0                                        | 19170402      |
| ECLASS-10.1                                       | 19170402      |
| ECLASS-11.1                                       | 19170402      |
| ECLASS-12.0                                       | 19170402      |
| ETIM-5.0                                          | EC000734      |
| Douane tarief nummer                              | 85176200      |
| GTIN                                              | 4048879797474 |
| Verpakkingseenheid                                | 1             |
| Electrical data   Supply                          |               |
| Operating voltage DC min.                         | 9 V           |
| Operating voltage DC max.                         | 30 V          |
| Current consumption max.                          | 450 mA        |
| Industrial communication                          |               |
| Data transmission rate max.                       | 1000 MBit/s   |
| Industrial communication   Ethernet functionality |               |
| Auto-crossover                                    | yes           |
| Auto-negotiation                                  | yes           |
| duplex                                            | Full duplex   |
| Switch type                                       | unmanaged     |

VLAN unmanaged (IEEE 802.1Q)      yes

#### Diagnostics

Alarm contact      no

Diagnostic      No voltage

LED display      Ethernet connection/data traffic

#### Device protection | Electrical

Degree of protection (EN IEC 60529)      IP20

Invers-polarity protection      yes

Over voltage protection      yes

#### Mechanical data | Material data

Color housing      black

Material housing      Plastic

#### Mechanical data | Mounting data

Mounting method      geschnappt

Suitable for mounting type      Mounting rail TH35, (EN 60715)

Height      90 mm

Width      45,2 mm

Depth      78 mm

#### Environmental characteristics | Climatic

Operating temperature min.      0 °C

Operating temperature max.      60 °C

Storage temperature min.      -10 °C

Storage temperature max.      70 °C

#### Connection type 2

Connection type 1      8

Connection type 2      X1

Family construction form      RJ45

Gender      female

Color contact carrier      black

No. of poles      8

PIN 1      TD +

PIN 2      TD -

PIN 3      RD +

PIN 4      n.c.

PIN 5      n.c.

PIN 6      RD -

PIN 7      n.c.

PIN 8      n.c.

Connection      Plug-in terminals RK

Family construction form      terminal

Gender      male

Color contact carrier      green

No. of poles      5

PIN 1      FE

PIN 2      0 V

PIN 3      24 V DC (UB 1)

PIN 4      0 V

PIN 5      24 V DC (UB 2)